



NEW !

**AUTOMATIC
NOZZLE**

FlowMatic Compact

Automatic, controlled pressure variable flow nozzle

- Body in Hard anodized Aluminum
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping perfect stream quality
- Powerful full cone spray for smothering flames.
- Pulsing mode with opening at 2 bar
- Unbreakable teeth : No maintenance
- Polyurethane Bumper: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris ingress.
- EN15182-2 certified



*Leader Nozzles are
available in 3
different sizes:*

Compact



Regular



Large



As part of our policy of constant research to improve our products, we reserve the right to modify our products characteristics at any time without notice

Characteristics


Model	Ref.	Weight	Flow rate	Pressure	Inlet	Special features
FlowMatic 125G	NAA-005-TI	1.75kg / 3.85 lbs	0 – 125 GPM	100 PSI	1.5" NPSH F	
FlowMatic 125G	NAA-006-RI				1.5" NH F	

Dimensions

For 1" and 1.5" inlet versions: L. 11.4" x l. 4.7" x h. 9" / L. 29 x l. 12 x h. 23cm

For 2" inlet version: L. 12.4" x l. 4.7" x h. 9" / L. 31.5 x l. 12 x h. 23cm

Curve: Flow vs Pressure

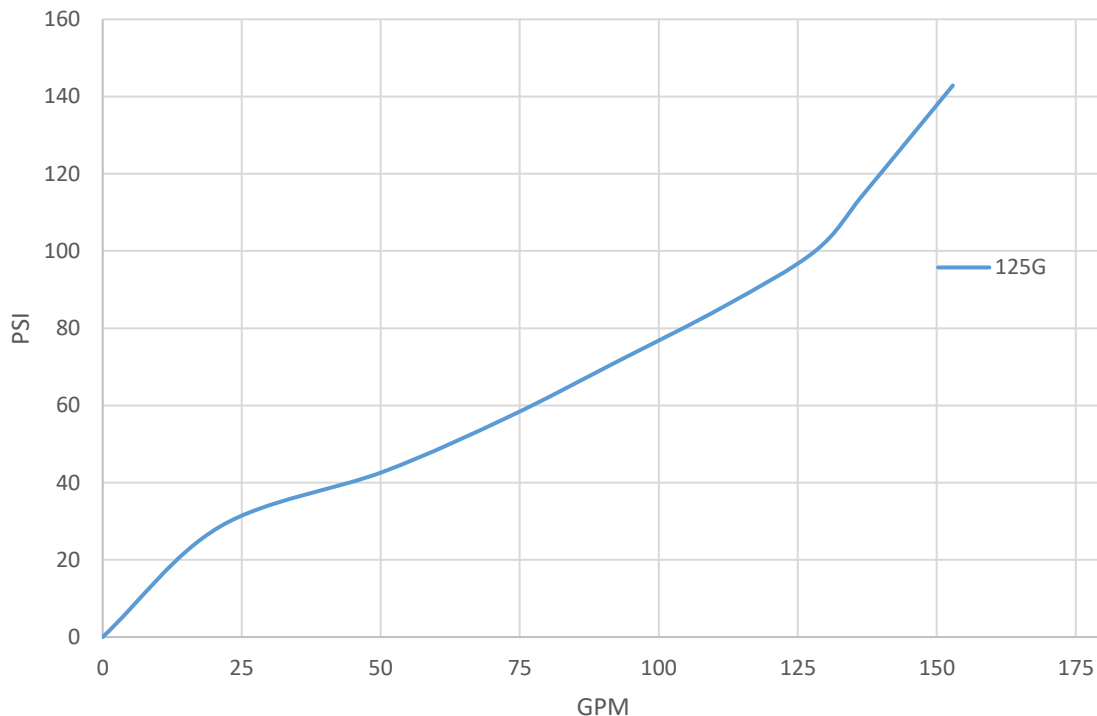

Options

All coupling types
Foam adapter
Coloured (red, blue, yellow, green, orange) flow control handle and pistol grip covers (Multimatic are delivered as standard with blue covers)

AA trigger version:
Flow handle lock, resettable in order to limit the maximum water flow



Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



ZF.01.289.US.1